



SILVER BRIDGE TRADING CORP

2- & 3-DOOR FREEZERS



Polar Freeze Brand

Self-Contained Display Case

Available in 2-Door and 3-Door Models
Upper Compressor & High Base

FEATURES

- **Reduced Maintenance Frequency**

The top-mounted unit avoids floor dust and lint, helping prevent condenser clogging and reducing maintenance.

- **Heavy-Duty Reinforced Shelving**

Engineered for high-density merchandising, these shelves provide rigid support that will not bow or deform, even under full load.


- **Frost-Free Air Cooling Technology**

Utilizes powerful air circulation to prevent ice build-up and ensure absolutely uniform temperature throughout the entire cabinet.

- **Full-Length Ergonomic Handel**

Featuring a vertical, top-to-bottom design that eliminates height restrictions, ensuring effortless access for users of any stature.

DIMENSIONS

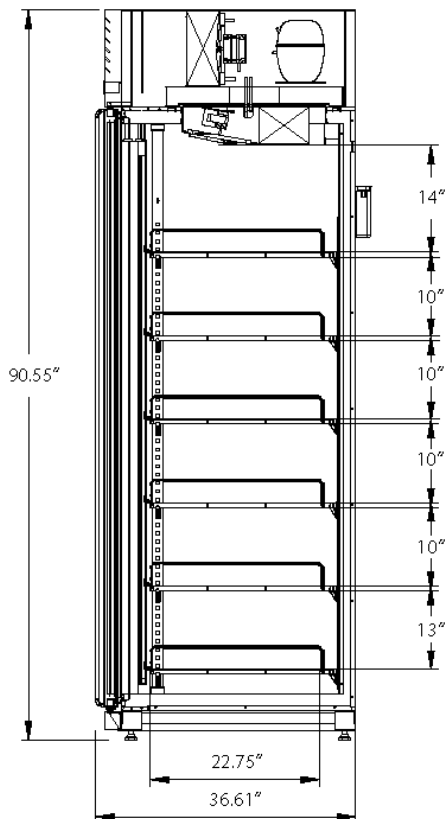

RECEPTACLE:
NEMA L5-30R



L5-30R



CONFORMS TO UL
STD. 471
CERTIFIED TO CSA
STD. C22.2 No. 120



CONFORMS
TO NSF
STD. 7



SPEC SHEETS

Model # PB-LB15E/KSX-L02-870	
(2-Door)	
Power Supply (Volt/Hertz)	110V/60Hz
Power (W)	1410W
Current Power (A)	15A
Receptacle	NEMA L5-30R
Defrosting Type	Electric Auto
Body Size (L*D*H)	60.24"*36.61"*90.55"
Shelves	5 Layers (10 Shelves) (L22"*D27.5")
Temperature	-0.4°F~7.6°F
Cooling System	Air Cooling
Compressor	Embraco VEH U413U*2
Evaporator Fan Motor	EBM Motor *2
Surrounding	III (77°F, 60% RH)
Refrigerant	R290
Evaporator	Copper Tubes with Aluminum Fins
Condenser	Copper Tubes with Aluminum Fins
Foaming Agent	Cyclopentane (38~40kg/m³)
Controller	Digital TLC-90 Plus Elitech
LED Light	Color Temperature: 7500K; Lumen: 850; CRI: 90-95, 24V

Model # PB-LB22E/KSX-L02-870	
(3-Door)	
Power Supply (Volt/Hertz)	110V/60Hz
Power (W)	2110W
Current Power (A)	26A
Receptacle	NEMA L5-30R
Defrosting Type	Electric Auto
Body Size (L*D*H)	88"*36.61"*90.55"
Shelves	5 Layers (15 Shelves) (L22"*D27.5")
Temperature	-0.4°F~7.6°F
Cooling System	Air Cooling
Compressor	Embraco VEH U413U*2
Evaporator Fan Motor	EBM Motor *3
Surrounding	III (77°F, 60% RH)
Refrigerant	R290
Evaporator	Copper Tubes with Aluminum Fins
Condenser	Copper Tubes with Aluminum Fins
Foaming Agent	Cyclopentane (38~40kg/m³)
Controller	Digital TLC-90 Plus Elitech
LED Light	Color Temperature: 7500K; Lumen: 850; CRI: 90-95, 24V